

15.4 Diagnosis and Solution

15.4.1 EEPROM parameter error diagnosis and solution

Error Code	E0/ EH 00/EH 0A/F4/ EC 51
Malfunction conditions	Indoor or outdoor PCB main chip does not receive feedback from EEPROM chip.
Potential causes	<ul style="list-style-type: none">● Installation mistake● Faulty PCB


Trouble shooting:

Power off, then restart the unit 2 minutes later. Does a problem still remain?


Yes

Replace the indoor/outdoor main PCB.

EEPROM: a type of read-only memory. The contents can be erased and reprogrammed using a pulsed voltage. To locate the EEPROM chip,

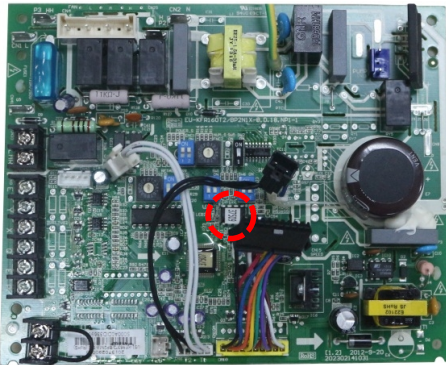

Indoor

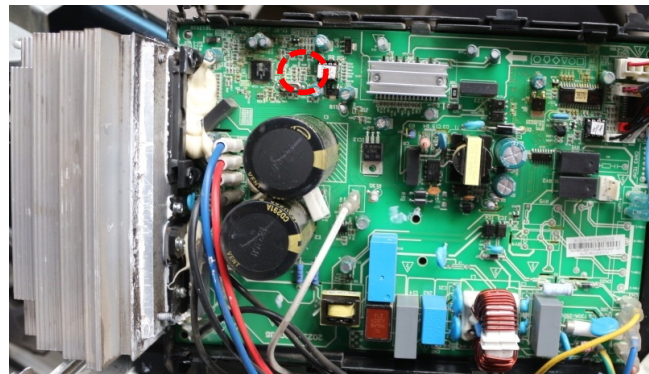

Outdoor

Note: The two photos above are only for reference purposes only. The design of the devices depicted may vary by model.