

Mitsutomo Submittal Data Sheet

24K BTU 4 Way Multi Zone Cassette

Job Name: _____

Engineer: _____


Submitted By: _____

Date: _____

Unit Tag: _____

System Info & Features:

- Large Handheld Remote
- 7 Day Wifi Programmable Wall Thermostat
- 4 Way Multi Directional
- Super Quiet
- Built in Condensate Pump

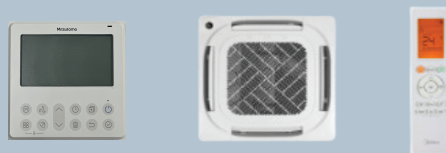

MODEL NUMBER	
Indoor unit:	HC-UZ24-AB-Q
Certified:	  

OPTIONAL ACCESSORIES	
3rd Party Interface Adapter	17222000A68532
WiFi Adapter	17310900A02901

SYSTEM PERFORMANCE DATA		
Electrical:		
Normal Operational Voltage	(V, Ph, Hz)	208/230V, 1Ph, 60Hz
Connection wiring		14/4 AWG
Nominal Capacity Data:		
Nominal Capacity	(Btu/h)	24000
*See Outdoor Unit For Rated Capacities		

INDOOR UNIT DATA		
Input	(W)	/
Output	(W)	45.0
Speed (Hi/Med/Lo)	(RPM)	680/624/568/512
Air Flow & Sound Data:		
Indoor air flow (Hi/Med/Lo)	(CFM)	764.7/705.88/635.29/547.06
Indoor noise level (Hi/Med/Lo)	(DBA)	48/45.5/43
Dry Mode (Dehumidification)	(LPH)	3

REFRIGERANT PIPE DATA		
Refrigerant type		R410A
Liquid side / Gas side	(inch)	3/8" / 5/8"
Connection method		Flared
Design pressure	(PSIG)	550/340
Temperature Ratings:		
Indoor (cooling)	(Deg. °F)	60~90
Indoor (heating)	(Deg. °F)	62~86
Freeze Mode	(Deg. °F)	32

Dimensions:		
Indoor:		
Dimension (WxDxH)	(inch)	32.68x32.68x8.07
Packing(WxDxH)	(inch)	35.83x35.83x9.84
Net/Gross weight	(lbs.)	47.18/55.34

WARRANTY	
	5 years compressor 5 years parts

Indoor Unit Dimension

