

## Mitsutomo Submittal Data Sheet

### R-454B 24K High Heat Multi Zone Wall Mounted Heat Pump

Job Name: \_\_\_\_\_

Engineer: \_\_\_\_\_

Submitted By: \_\_\_\_\_

Date: \_\_\_\_\_

Unit Tag: \_\_\_\_\_

#### System Info & Features:

- Large display handheld remote
  - 24 hr timer
  - Error code diagnosis
  - Functions settings (see manual)
- Economy mode
- Turbo mode
- Dry mode



MODEL NUMBER	
Indoor unit:	HW-UZ24-LA-Q
Certified:	   

SYSTEM PERFORMANCE DATA		
<b>Electrical:</b>		
Normal Operational Voltage	(V, Ph, Hz)	208/230V,60Hz,1Ph
Connection wiring		14/4
<b>Performance Data:</b>		
Rated Capacity		23000
Min/Max Capacity		16800-24500
Moisture Removal	(L/H)	2.6

REFRIGERANT PIPE DATA		
Refrigerant Type		R454B
Liquid Side	(inch)	3/8
Gas Side	(inch)	5/8
Connection Method		Flared
<b>Temperature Ratings:</b>		
Indoor (cooling)	(Deg. °F)	-22~122
Indoor (heating)	(Deg. °F)	-22~75


OPTIONAL ACCESSORIES	
3rd Party Thermostat Interface Adapter	17222000A68532

INDOOR UNIT DATA		
Fan Motor	(RLA)	1.3
Fan Motor	(W)	58
<b>Air Flow &amp; Sound Data:</b>		
Indoor Air Flow (Turbo/H/M/L/Q)	(CFM)	759.3 / 588.6 / 459.1 / 382.6 / 382.6
Indoor Noise Level (Turbo/H/M/L/Q)	(DBA)	54.5/49.5/43.5/34.5/20.5

Dimensions:		
<b>Indoor:</b>		
Dimension (WxDxH)	(inch)	42.60 x 9.21 x 13.27
Packing(WxDxH)	(inch)	45.47 x 12.40 x 16.34
Unit weight	(lbs.)	30.86
Shipping Weight	(lbs.)	40.56

WARRANTY	
	5 years compressor 5 years parts

### Indoor Unit Dimension (External Pump)

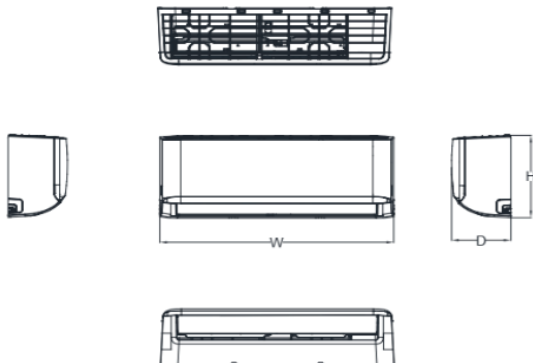

Capacity	W	D	H
24k	42.60	9.21	13.27