

Mitsutomo Submittal Data Sheet

R-454B 33K High Heat Multi Zone Wall Mounted Heat Pump

Job Name: _____

Engineer: _____

Submitted By: _____

Date: _____

Unit Tag: _____

System Info & Features:

- Large display handheld remote
- 24 hr timer
- Error code diagnosis
- Functions settings (see manual)
- Economy mode
- Turbo mode
- Dry mode



MODEL NUMBER	
Indoor unit:	HW-UZ33-LA-Q
Certified:	   

OPTIONAL ACCESSORIES	
3rd Party Thermostat Interface Adapter	17222000A68532

SYSTEM PERFORMANCE DATA		
Electrical:		
Normal Operational Voltage	(V, Ph, Hz)	208/230V,60Hz,1Ph
Connection wiring		14/4
Performance Data:		
Rated Capacity		33000
Min/Max Capacity		15000-35900
Moisture Removal	(L/H)	4.5


INDOOR UNIT DATA		
Fan Motor	(RLA)	1.6
Fan Motor	(W)	58
Air Flow & Sound Data:		
Indoor Air Flow (Turbo/H/M/L/Q)	(CFM)	829.9 / 676.9 / 529.7 / 447.3 / 447.3
Indoor Noise Level (Turbo/H/M/L/Q)	(DBA)	56.0 / 52.5 / 46.5 / 29.5 / 23.0

REFRIGERANT PIPE DATA		
Refrigerant Type		R454B
Liquid Side	(inch)	3/8
Gas Side	(inch)	3/4
Connection Method		Flared
Temperature Ratings:		
Indoor (cooling)	(Deg. °F)	-22~122
Indoor (heating)	(Deg. °F)	-22~75

Dimensions:		
Indoor:		
Dimension (WxDxH)	(inch)	49.57 x 11.14 x 14.25
Packing(WxDxH)	(inch)	52.76 x 17.72 x 15.16
Unit weight	(lbs.)	43.21
Shipping Weight	(lbs.)	57.32

WARRANTY	
	5 years compressor 5 years parts

Indoor Unit Dimension (External Pump)

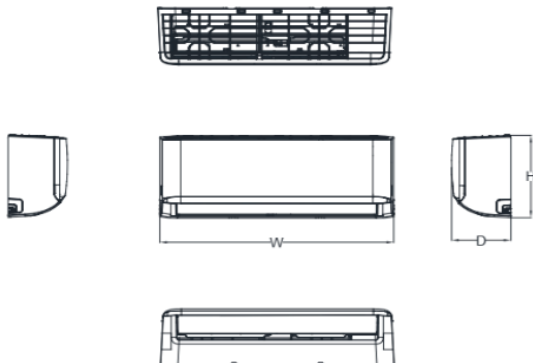

Capacity	W	D	H
33k	49.57	11.14	14.25