

Mitsutomo Submittal Data Sheet

R-454B 6K High Heat Multi Zone Wall Mounted Heat Pump

Job Name: _____

Engineer: _____

Submitted By: _____

Date: _____

Unit Tag: _____

System Info & Features:

- Large display handheld remote
 - 24 hr timer
 - Error code diagnosis
 - Functions settings (see manual)
- Economy mode
- Turbo mode
- Dry mode



MODEL NUMBER	
Indoor unit:	HW-UZ06-LA-Q
Certified:	   

OPTIONAL ACCESSORIES	
3rd Party Thermostat Interface Adapter	17222000A68532

SYSTEM PERFORMANCE DATA		
Electrical:		
Normal Operational Voltage	(V, Ph, Hz)	208/230V,60Hz,1Ph
Connection wiring		14/4
Performance Data:		
Rated Capacity		6000
Min/Max Capacity		2500~11500
Moisture Removal	(L/H)	0.3


INDOOR UNIT DATA		
Fan Motor	(RLA)	0.4
Fan Motor	(W)	13
Air Flow & Sound Data:		
Indoor Air Flow (Turbo/H/M/L/Q)	(CFM)	294.3 / 235.4 / 176.6 / 141.3 / 141.3
Indoor Noise Level (Turbo/H/M/L/Q)	(DBA)	42.0 / 37.0 / 32.0 / 24.0 / 20.0

REFRIGERANT PIPE DATA		
Refrigerant Type		R454B
Liquid Side	(inch)	1/4
Gas Side	(inch)	3/8
Connection Method		Flared
Temperature Ratings:		
Indoor (cooling)	(Deg. °F)	-22~122
Indoor (heating)	(Deg. °F)	-22~75

Dimensions:		
Indoor:		
Dimension (WxDxH)	(inch)	28.70 x 7.87 x 11.50
Packing(WxDxH)	(inch)	31.10 x 10.63 x 14.76
Unit weight	(lbs.)	17.64
Shipping Weight	(lbs.)	23.15

WARRANTY	
	5 years compressor 5 years parts

Indoor Unit Dimension (External Pump)

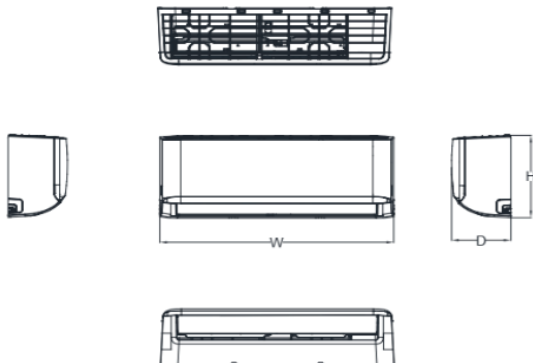

Capacity	W	D	H
6k	28.70	7.87	11.50