

Mitsutomo Submittal Data Sheet

R-454B 6K High Heat 1-Way Cassette Heat Pump System

Job Name: _____

Engineer: _____


Submitted By: _____

Date: _____

Unit Tag: _____

System Info & Features:

- One way ceiling cassette heat pumps
- Fits between most ceiling joists
- Large display and handheld remote
 - 24 hour timer
 - Error code diagnosis
 - Functions settings (see manual)
- 7-Day Programmable wall mount wifi thermostat with infrared
- Economy mode
- Turbo mode
- Dry mode
- Heating down to -22 degrees
- Drop down filter



MODEL NUMBER

Indoor unit:	HJ-UZ06-LA-Q
Outdoor unit:	HO-SZ06-LA-Q
Certified:	   

OPTIONAL ACCESSORIES

Wifi Adapter	17310900A02901
3rd Party Thermostat Interface Adapter	17222000A68532

SPECIFICATIONS

Indoor:

Indoor Air Flow (Turbo/H/M/L/Q)	(CFM)	341.4 / 294.3 / 259.0 / 235.4 / 235.4
Indoor Noise Level (Turbo/H/M/L/Q)	(DBA)	46.5 / 37.5 / 35.5 / 26 / 23.5

Heating Efficiencies and Performance

Compressor Type		ROTARY
Refrigerant		R454B
Refrigerant Oil Charge	(OZ)	10.48
Refrigerant Oil		VG74
Outdoor Air Flow (Max)	(CFM)	1236.1
Outdoor Noise Level	(DBA)	53.5

DIMENSIONS

Indoor:

Dimension	(W×D×H)	50.31 x 13.19 x 8.98
Package	(W×D×H)	57.60 x 22.48 x 22.64
Unit Weight	(lbs)	45.19
Shipping Weight	(lbs)	82.45

Outdoor:

Dimension	(W×D×H)	30.12 x 11.93 x 21.85
Package	(W×D×H)	34.92 x 13.27 x 24.02
Unit Weight	(lbs)	62.17
Shipping Weight	(lbs)	67.68

REFRIGERANT PIPE DATA

Liquid Size	(in.)	1/4
Gas Size	(in.)	3/8
Max. Piping Length	(ft)	82.02
Max. Height Differencex	(ft)	49.21
Max. Pre-charged Length	(ft)	24.6
Refrigerant Pre-charged Amount	(oz)	32.45
Additional Charge of Refrigerant	(oz/ft)	0.16
Connection Method		Flared

WARRANTY



5 years compressor
5 years parts

SYSTEM PERFORMANCE AND DATA

Cooling Efficiencies and Performance

SEER2	22.0
EER2	15
Rated Capacity	6500
Min/Max Capacity	3600~11200
Moisture Removal	(L/h) 0.34
Standard Operating Range	(F°) -22~-122

Conditions: Indoor: 80F° DB/67F° WB
Outdoor: 95F° DB/75F° WB

Heating Efficiencies and Performance


HSPF2-4	12.0
COP	3.75
1. @ 47F° Rated	7400
2. @ 47F° Min/Max Capacity	3700~11500
3. @ 17F° Rated	7000
4. @ 5F° Rated: Capacity / COP	8100/2.40
5. @ 5F° Max: Capacity	8100
Standard Operating Range (F°)	-22~75

1. Conditions: Indoor: 70F° DB/60F° WB
Outdoor: 47F° DB/43F° WB
2. Conditions: Indoor: 70F° DB/60F° WB
Outdoor: 17F° DB/15F° WB
3. Conditions: Indoor: 70F° DB/60F° WB
Outdoor: 5F° DB/5F° WB

ELECTRICAL

Power Supply	208/230V,60Hz,1Ph	
System Min. Circuit Amps		12.00
Connection Wiring		14/4
System Max Over Current Protection	(A)	15
Compressor	(RLA)	7.3
Outdoor Fan Motor	(RLA)	0.6
Outdoor Fan Motor	(W)	34
Indoor Fan Motor	(RLA)	0.8
Indoor Fan Motor	(W)	30
System Power Input @ Cooling	(W)	427(155 ~ 680)
System Power Input @ Heating	(W)	578(290 ~950)

Outdoor Unit Dimension

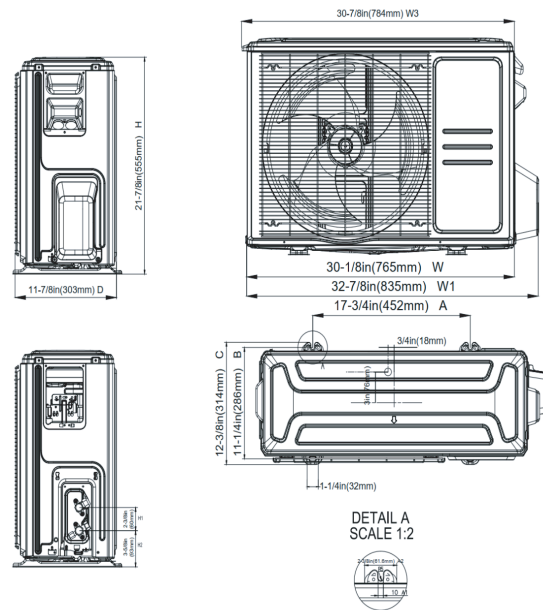

Indoor Unit Dimension (Internal Pump)

