

Mitsutomo Submittal Data Sheet

12K BTU 4 Way Multi Zone Cassette

Job Name: _____

Engineer: _____


Submitted By: _____

Date: _____

Unit Tag: _____

System Info & Features:

- Large Handheld Remote
- 7 Day Wifi Programmable Wall Thermostat
- 4 Way Multi Directional
- Super Quiet
- Built in Condensate Pump

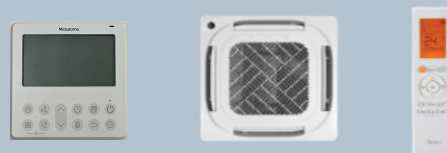

MODEL NUMBER	
Indoor unit:	HC-UZ12-AB-Q
Certified:	  

OPTIONAL ACCESSORIES	
3rd Party Interface Adapter	17222000A68532
WiFi Adapter	17310900A02901

SYSTEM PERFORMANCE DATA		
Electrical:		
Normal Operational Voltage	(V, Ph, Hz)	208/230V,1Ph, 60Hz
Connection wiring		14/4 AWG
Nominal Capacity Data:		
Nominal Capacity	(Btu/h)	12000
*See Outdoor Unit For Rated Capacities		


INDOOR UNIT DATA		
Input	(W)	45.00
Output	(W)	46.0
Speed (Hi/Med/Lo)	(RPM)	/
Air Flow & Sound Data:		
Indoor air flow (Hi/Med/Lo)	(CFM)	335.29/282.35/241.18
Indoor noise level (Hi/Med/Lo)	(DBA)	40.5/35.5/31.5
Dry Mode (Dehumidification)	(LPH)	1.69

REFRIGERANT PIPE DATA		
Refrigerant type		R410A
Liquid side / Gas side	(inch)	1/4" / 1/2"
Connection method		Flared
Design pressure	(PSIG)	550/340
Temperature Ratings:		
Indoor (cooling)	(Deg. °F)	60~90
Indoor (heating)	(Deg. °F)	62~86
Freeze Mode	(Deg. °F)	32

Dimensions:		
Indoor:		
Dimension (WxDxH)	(inch)	22.44x22.44x10.24
Packing(WxDxH)	(inch)	26.06x26.06x12.48
Net/Gross weight	(lbs.)	35.27/41.01

WARRANTY	
	5 years compressor 5 years parts

Indoor Unit Dimension

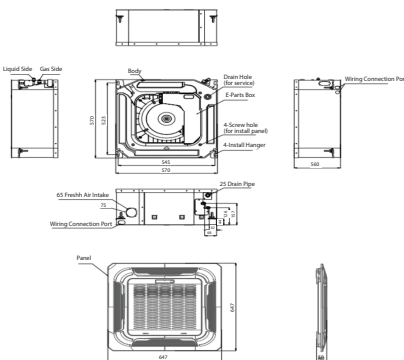

(Mitsutomo's products are subject to continuous improvements. Mitsutomo reserves the right to modify product design specifications and information in this data sheet without notice and without incurring any obligations)