

Mitsutomo Submittal Data Sheet

R-454B 18K High Heat Multi Zone Wall Mounted Heat Pump

Job Name: _____

Engineer: _____

Submitted By: _____

Date: _____

Unit Tag: _____

System Info & Features:

- Large display handheld remote
 - 24 hr timer
 - Error code diagnosis
 - Functions settings (see manual)
- Economy mode
- Turbo mode
- Dry mode



MODEL NUMBER	
Indoor unit:	HW-UZ18-LA-Q
Certified:	   

OPTIONAL ACCESSORIES	
3rd Party Thermostat Interface Adapter	17222000A68532

SYSTEM PERFORMANCE DATA		
Electrical:		
Normal Operational Voltage	(V, Ph, Hz)	208/230V,60Hz,1Ph
Connection wiring		14/4
Performance Data:		
Rated Capacity		18000
Min/Max Capacity		8400-20200
Moisture Removal	(L/H)	1.8


INDOOR UNIT DATA		
Fan Motor	(RLA)	0.8
Fan Motor	(W)	58
Air Flow & Sound Data:		
Indoor Air Flow (Turbo/H/M/L/Q)	(CFM)	759.3 / 500.3 / 441.4 / 370.8 / 370.8
Indoor Noise Level (Turbo/H/M/L/Q)	(DBA)	54.5 / 45.0 / 40.0 / 24.5 / 20.0

REFRIGERANT PIPE DATA		
Refrigerant Type		R454B
Liquid Side	(inch)	1/4
Gas Side	(inch)	1/2
Connection Method		Flared
Temperature Ratings:		
Indoor (cooling)	(Deg. °F)	-22~122
Indoor (heating)	(Deg. °F)	-22~75

Dimensions:		
Indoor:		
Dimension (WxDxH)	(inch)	42.60 x 9.21 x 13.27
Packing(WxDxH)	(inch)	45.47 x 12.40 x 16.34
Unit weight	(lbs.)	30.42
Shipping Weight	(lbs.)	39.68

WARRANTY	
	5 years compressor 5 years parts

Indoor Unit Dimension (External Pump)

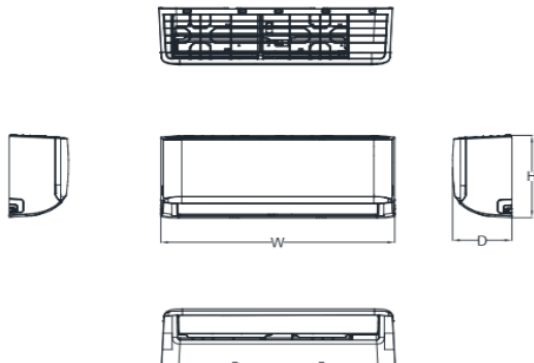

Capacity	W	D	H
18k	42.60	9.21	13.27